

Tire Size	Service Description	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width	Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs=psi)
195/60R14	86H	RRBL	68996						
195/65R14	89H	RRBL	88920	5.5 - 7.5	8.3 on 6.0	23.8	10	870	1356@44
185/65R15	88H	RRBL	57285	5.0 - 6.5	7.5 on 5.5	24.5	9	849	1235@44
195/60R15	88V	RRBL	78046	5.5 - 7.0	7.8 on 6.0	24.1	9	862	1235@44
195/60R15	88H	RRBL	93788	5.0 - 7.0	7.5 on 5.5	24.2	10	862	1201@44
195/65R15	91H	RRBL	57037	5.0 - 7.0	8.0 on 6.0	24.9	9	835	1356@44
P195/65R15	89H	RRBL	74664	5.0 - 7.0	8.0 on 6.0	24.9	9	836	1279@35
P195/65R15	89V	RRBL	73099	5.5 - 7.0	8.0 on 6.0	24.9	9	835	1279@35
P195/60R15	87H	RRBL	57849	5.5 - 7.0	7.8 on 6.0	24.1	9	862	1190@35
205/60R15	91H	RRBL	82583	5.5 - 7.5	8.3 on 5.5	24.8	10	837	1356@44
205/60R15	91V	RRBL	62924	5.5 - 7.5	8.3 on 5.5	24.8	10	837	1356@44
P205/60R15	90H	RRBL	63482	5.5 - 8.0	8.3 on 5.5	24.8	10	837	1301@35
205/65R15	94H	RRBL	67470	5.5 - 7.5	8.5 on 6.0	25.5	9	817	1477@44
P205/65R15 ZP	92H	RRBL	48797	5.5 - 7.5	8.3 on 6.0	25.6	9	816	1400@35
P205/65R15	92V	RRBL	90889	5.5 - 7.5	8.5 on 6.0	25.5	9	817	1400@44
P205/65R15	92H	RRBL	74594	5.5 - 7.5	TBD	TBD	TBD	TBD	TBD
215/60R15	94H	RRBL	73694	6.0 - 7.5	8.7 on 6.0	25.0	10	831	1477@44
225/60R15	96H	RRBL	59616	6.0 - 8.0	9.1 on 7.0	25.8	10	805	1565@44
205/55R16	91H	RRBL	93306	5.5 - 7.5	8.8 on 7.0	24.9	10	840	1323@51
205/55R16	91V	RRBL	56548	5.5 - 8.0	8.3 on 6.0	25.0	10	831	1356@44
205/55R16	91H	RRBL	71970	6.0 - 7.0	8.5 on 6.5	24.9	10	832	1279@44
205/55R16	91H	RRBL	79258	6.0 - 7.0	8.5 on 6.5	24.9	10	832	1279@44
P205/60R16	91V	RRBL	91622	5.5 - 7.0	8.3 on 5.5	25.6	10	813	1356@44
P205/60R16	91V	RRBL	40016	5.5 - 7.5	8.3 on 5.5	25.6	10	813	1356@44
P205/60R16	91H	RRBL	66768	5.5 - 7.5	8.3 on 6.0	25.6	10	813	1356@44
215/55R16	93H	RRBL	62293	6.0 - 7.5	8.9 on 7.0	25.5	10	814	1433@44
P215/55R16	91V	RRBL	60396	6.0 - 7.5	8.9 on 7.0	25.5	10	816	1356@44
215/60R16	95H	RRBL	94121	6.0 - 7.5	9.0 on 6.5	26.4	10	789	1521@44
P215/60R16	94V	RRBL	73527	6.0 - 7.5	8.7 on 6.5	26.1	10	799	1477@44
P225/60R16	97H	RRBL	74234	6.0 - 9.0	9.3 on 6.5	26.8	10	777	1609@44
225/60R16	98H	RRBL	93503	6.0 - 8.0	9.3 on 7.5	26.8	10	785	1653@51
P225/60R16 ZP	97H	RRBL	46275	6.0 - 9.0	9.3 on 6.5	26.8	10	776	1609@44
P225/60R16	97V	RRBL	62213	6.0 - 8.0	9.3 on 6.5	26.8	10	777	1609@35
235/60R16	100H	RRBL	74113	6.5 - 8.5	9.6 on 7.0	26.9	10	772	1764@44
P235/60R16	99V	RRBL	51795	6.5 - 8.5	9.6 on 7.0	26.9	10	772	1709@35
225/55R17	97H	RRBL	60430	6.0 - 8.0	9.4 on 7.0	26.9	10	774	1609@44
P225/55R17	95H	RRBL	58493	6.0 - 8.0	9.1 on 7.0	26.8	10	782	1521@44
P225/55R17	95V	RRBL	60199	6.0 - 8.0	9.1 on 7.0	26.7	10	784	1521@44
235/65R17	104H	RRBL	58071	6.5 - 8.5	9.8 on 7.5	29.1	10	718	1984@51
P235/55R17	98H	RRBL	89205	6.5 - 8.5	9.4 on 7.5	27.2	10	760	1653@44
255/55R18	105H	RRBL	79347	7.0 - 9.0	10.4 on 8.5	28.9	10	713	2040@51

Michelin® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligation.

- The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.
- Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width. **WARNING:** Serious or fatal injury may result from improper mounting, from under-inflation/over-inflation/over-loading or from tire damage due to abusive use. For proper mounting, see tire dealer. For proper tire size and inflation pressure, consult Tire Information Placard in vehicle. or high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual. For speeds over 100 mph, load and inflation must be adjusted according to the table below.

H-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130
Inflation Increase (psi)	0	1	2	3	4	5
Load Capacity (% of max.)	100	100	100	100	100	100

V-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0	1	2	3	4	5	5	5	5
Load Capacity (% of max.)	100	100	100	100	100	100	97	94	91

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed rated tire on the vehicle. Exceeding the awful speed limit is neither recommended nor endorsed.


TBD = Data not available at time of printing.

ADDED CONFIDENCE thanks to a rounder, European tire profile that reveals cornering limits predictably and progressively.

IMPROVED RIDE COMFORT, HANDLING PROGRESSIVITY AND EXTENDED SHOULDER LIFE all due to multi-function circumferential shoulder groove.

EXCEPTIONALLY QUIET RIDE due to the diagonal tread design that allows the computer-optimized tread blocks to "flow" through the contact patch.

CONSISTENT HANDLING AND PRECISE CONTROL AT HIGH SPEEDS provided by BAZ Technology™ (spiral wrapped nylon Banded At Zero degrees to tire rotation).

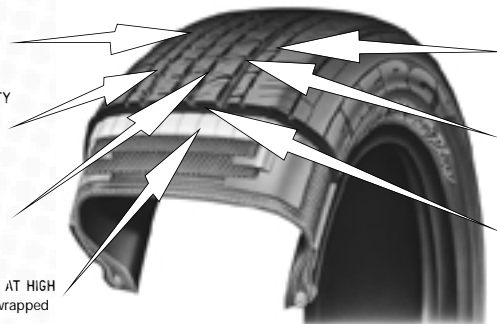

BETTER BALANCE OF WET AND SNOW TRACTION, TREADWEAR AND FUEL EFFICIENCY thanks to next generation Radial XSE® Technology smart compounds.

EXTRA SNOW TRACTION provided by dual-siped blocks and complemented by the radial grooves and sipes in the shoulder blocks.

EFFICIENT WATER EVACUATION TO COMBAT HYDROPLANING WITH OUTSTANDING NOISE SUPPRESSION due to optimized circumferential groove sizing, with larger grooves toward the shoulder.

