

except: P275/70R16 114H = 440 A A

Tire Size	Service Description	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width	Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	SINGLE MAX LOAD (LBS.) PER TIRE @ PSI	DUAL MAX LOAD (LBS.) PER TIRE @ PSI
LT195/75R14/C	93/90R LRC	ORWL	10674	5.0 - 6.0	7.9 on 5.5	25.5	13	824	1435@50	1325@50
LT215/75R15/C	100/97R LRC	ORWL	26820	5.5 - 7.0	8.7 on 6.0	27.7	13	755	1765@50	1610@50
LT235/75R15/C	104/101R LRC	ORWL	78868	6.0 - 7.0	9.5 on 6.5	28.8	13	727	1985@50	1820@50
LT215/85R16/E	115/112R LRE	ORBL	57810	5.5 - 7.0	8.7 on 6.0	30.5	15	685	2335@65	2150@65
LT215/85R16/D	110/107R LRD	ORBL	20898	5.0 - 7.0	8.7 on 6.0	30.5	15	685	2680@80	2470@80
LT225/75R16/D	110/107R LRD	ORWL	20436	6.0 - 7.0	9.1 on 6.0	29.3	15	709	2335@65	2150@65
LT225/75R16/D	110/107R LRD	ORBL	00978	6.0 - 7.0	9.1 on 6.0	29.3	15	709	2335@65	2150@65
LT225/75R16/E	115/112R LRE	ORBL	25516	6.0 - 7.0	9.1 on 6.0	29.5	15	709	2680@80	2470@80
LT235/85R16/D	114/111R LRD	ORBL	06854	6.0 - 7.0	9.2 on 6.5	31.9	15	655	2623@65	2381@65
LT235/85R16/E	120/116R LRE	ORWL	16658	6.0 - 7.0	9.3 on 6.5	32.0	15	654	3042@80	2778@80
LT235/85R16/E	120/116R LRE	ORBL	07364	6.0 - 7.0	9.3 on 6.5	32.0	15	654	3042@80	2778@80
LT245/75R16/E	120/116R LRE	ORWL	60856	6.0 - 7.0	9.8 on 7.0	30.7	15	681	3042@80	2778@80
LT245/75R16/E	120/116R LRE	ORBL	22606	6.0 - 7.0	9.8 on 7.0	30.7	15	681	3042@80	2778@80
LT265/75R16/C	112/109R LRC	ORWL	10570	7.0 - 8.0	10.7 on 7.5	31.8	15	658	2470@50	2270@50
LT265/75R16/E	123/120R LRE	ORWL	52169	7.0 - 8.0	10.7 on 7.5	31.8	14	652	3415@80	3085@80
LT285/75R16/D*	122/119R LRD	ORWL	78276	7.5 - 9.0	11.3 on 8.0	32.8	15	634	3305@65	3000@65
30x9.50R15LT/C	104R LRC	ORWL	09418	6.5 - 8.5	9.6 on 7.0	29.6	15	706	1985@50	
31x10.50R15LT/C	109R LRC	ORWL	24798	7.0 - 9.0	11.1 on 9.0	30.8	15	679	2270@50	
32x11.50R15LT/C	113R LRC	ORWL	09478	8.0 - 10.0	11.6 on 9.0	31.7	15	662	2535@50	
33x12.50R15LT/C	108R LRC	ORWL	24218	8.5 - 11.0	12.8 on 10.0	32.6	15	642	2205@35	
P205/75R15	97S	ORWL	70051	5.5 - 7.5	8.1 on 5.5	27.0	13	777	1435@35	
P215/75R15	100S	ORWL	23526	5.5 - 7.5	8.6 on 6.0	27.6	13	754	1584@35	
P225/70R15	100S	ORWL	48079	6.0 - 8.0	9.0 on 6.5	27.4	13	765	1594@35	
P225/75R15	102S	ORWL	76017	6.0 - 8.0	9.0 on 6.0	28.3	13	741	1703@35	
P235/70R15	102S	ORWL	97679	6.0 - 8.0	9.4 on 7.0	27.9	13	746	1724@35	
P235/75R15	105S	ORWL	26632	6.0 - 8.5	9.4 on 6.5	28.7	13	728	1844@35	
P235/75R15/XL	108S	ORWL	29394	6.0 - 8.5	9.4 on 6.5	28.8	13	728	1985@41	
P235/75R15/XL	108S	ORBL	57653	6.5 - 8.5	9.4 on 6.5	28.8	13	728	1985@41	
P215/70R16	99S	ORWL	60041	5.5 - 7.0	8.7 on 6.5	27.8	13	755	1554@35	
P225/70R16	101S	ORBL	62260	6.0 - 7.0	8.9 on 6.5	28.4	13	738	1654@35	
P225/70R16	101S	ORWL	52470	6.0 - 7.0	8.9 on 6.5	28.4	13	738	1654@35	
P235/70R16	104S	ORWL	59257	6.0 - 7.5	9.6 on 7.0	29.1	13	722	3607@35	
P235/75R16*	106S	ORWL	76374	6.0 - 8.0	9.4 on 6.5	29.9	13	696	1904@35	
P245/70R16	106S	ORWL	84843	6.5 - 8.0	9.8 on 7.0	29.6	13	707	1904@35	
P245/75R16	109S	ORWL	63571	6.5 - 8.0	9.7 on 7.0	30.4	13	684	2065@35	
P255/65R16	106S	ORBL	61571	7.0 - 9.0	10.1 on 7.5	29.2	11	712	1904@35	
P255/70R16	109S	ORWL	39992	6.5 - 8.0	10.3 on 7.5	30.2	13	694	2065@35	
P265/70R16	111S	ORWL	85423	7.0 - 8.5	10.7 on 8.0	30.7	13	681	2185@35	
P265/75R16	114S	ORWL	97979	7.0 - 9.0	10.5 on 7.5	31.6	13	658	2365@35	
P275/70R16	114H	ORBL	98835	7.0 - 10.0	11.1 on 8.0	31.3	12	666	2365@44	
P275/70R16	114S	ORBL	43428	7.0 - 10.0	11.1 on 8.0	31.3	12	666	2365@35	
P245/65R17	105S	ORBL	62573	7.0 - 8.5	9.6 on 7.0	29.7	11	700	1854@35	
P265/70R17	113S	ORWL	66259	7.0 - 8.5	10.8 on 8.0	31.8	13	656	2305@35	

*Load reduced by 9.1% for Light Truck/SUV application. This will differ from maximum load branded on tire sidewall.

Michelin® tires and tubes are subject to a continuous development program. Michelin North America reserves the right to change product specifications at any time without notice or obligation.

1. The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.

2. Overall width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

Note: Use only on rims designated by the rim manufacturer as suitable for radial tires. Passenger sizes in Light Truck applications have reduced load. This will differ from maximum load molded on tire sidewall.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

WARNING: Serious or fatal injury may result from: • Tire failure due to under-inflation/over-inflation/over-loading – follow owner's manual or Tire Information Placard in vehicle.

• Explosion of tire/rim assembly due to improper mounting – never inflate beyond 40 psi to seat beads. See Tire Dealer for proper mounting. • Mixing bias tires with radials on the same vehicle.

• Mixing different tire sizes – follow vehicle manufacturer's recommendations.

*Available Q4 2002

S-Speed Rated Sizes:
Maximum Speed (mph) 100 106 112
Inflation Increase (psi) 0 1 2
Load Capacity (% of max) 100 100 100


H-Speed Rated Sizes:
Maximum Speed (mph) 100 106 112 118 124 130
Inflation Increase (psi) 0 1 2 3 4 5
Load Capacity (% of max) 100 100 100 100 100 100

LONGER TIRE LIFE because of large contact patch and enhanced tread block stability.

EXCEPTIONALLY QUIET RIDE due to the noise-minimizing tread block pattern.

INCREASED DURABILITY because of a third steel belt in D & E load ranges.

LONGER TREAD LIFE thanks to state-of-the-art casing that more evenly distributes stresses.

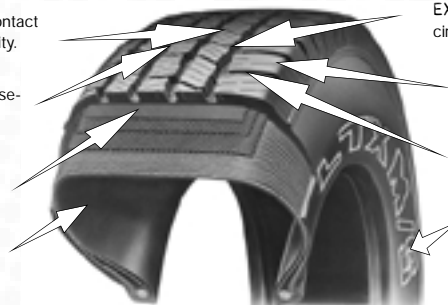

EXCEPTIONAL WET TRACTION results from deep, circumferential grooves.

EXCELLENT SNOW TRACTION and enhanced cornering due to interlocking, full-depth sipes and tread block stability.

MAINTAIN EXCELLENT GRIP in all weather conditions because of special tread rubber compound.

ATTRACTIVE, SPORTY LOOK with bold, new sidewall styling.

